


Smart Hose™, Accuflex Thermoplastic Hose

SMART HOSE™

The Smart-Hose safety system is combined with a heavy duty LPG transfer hose designed to meet the most rugged applications found in the LPG industry. All hose meets UL 21. To achieve lower operating cost, return used Smart-Hose couplings for attachment to new hose.

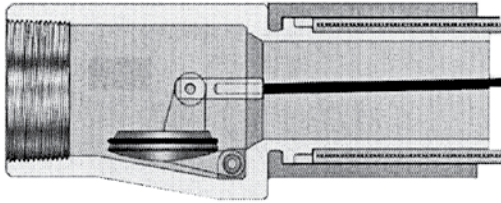

1. Each hose is tested under water with dry air or nitrogen to Test Pressure.
2. Each hose is serial numbered.
3. Each hose comes with Test Certification & Operating Booklet.
4. 316 Stainless steel couplings are designed for reuse on new hose.
5. Each hose meets DOT HM225 - 46CFR 173.315
6. Each hose meets NFPA 58 & 59
7. Each hose meets DOT HM212 - (Special rail car unloading exemption eliminates requirement for human monitoring during unloading procedure) DOT-SP 1232S

Hose Data:

Cover - Black CR w/Blue Longitudinal Stripe - abrasion and weather resistant
 Reinforcement - Multiple layers of Polyester - min. burst 1750 PSI
 Tube - oil resistant - resistant to permeation of Butane/Propane
 Branding - LPG Hose MH12585 350 MAX WP, Quarterly/Year. Made in USA
 TEMPERATURE - -40°F to 180°F

Part Number	Description
FH2	2" x 15' OAL Smart Hose System Lifeline 3 Facility Hose FPT x FPT
SH2F	2" FPT x 18' OAL Smart Hose Lifeline 3 for LP
SH2FA	2" FPT x 18' OAL Smart Hose Lifeline 3 for NH3



bergquistinc.com | 800 537 7518

Accuflex Thermoplastic Hose

Part Number	ID	OD	Standard Roll Size
469-04	1/4"	.5"	500'
469-05	5/16"	.56"	500'
469-06	3/8"	.65"	500'

ACCUFLEX THERMOPLASTIC HOSE



Standard package is 500'.
100' lengths can be ordered.

469-06

Low pressure 'Red' Dayco Hose

Part Number	Size	Pressure Rating	Ferrule Required
LP06	3/8" I.D.	125 psig	7329



LP06

Carburetion Hose ("Skunk Hose")

Part Number	Description
VH100	1" Vapor Carb Hose



VH100

