

DORMONT CONNECTORS

Dormont residential connectors are durable, flexible, and easy to install. Designed with built-in safety features, Supr-Safe connectors help prevent dangerous gas leaks and provide for a long and trouble-free service life.



1637NX12

Stainless Steel Gas Appliance Connectors

3/8" ID / 1/2" OD with 1/2" female x 1/2" male		1/2" ID / 7/8" OD with 3/4" female x 3/4" male	
Length	Part No.	Length	Part No.
12"	1637NX12	12"	1650NX12
18"	1637NX18	18"	1650NX18
24"	1637NX24	24"	1650NX24
36"	1637NX36	36"	1650NX36
48"	1637NX48	48"	1650NX48
60"	1637NX60	60"	1650NX60

Super-Safe™ Connectors for Mobile Homes

Part No.	Description	Length
1675NPX24	3/4" I.D. / 1" O.D.	24"
1675NPX36	3/4" I.D. / 1" O.D.	36"




1675NPX24

Dormont Black Appliance Connectors

Specifically engineered for High-Temperature applications such as gas logs, fireplace inserts, etc. Designed to reduce glare & hide the connector from view.

1/4" ID x 3/8" OD - 3/8" MPT x 1/2" FNPT	
Part #	Length
10-2132-12	12"
10-2132-18	18"
10-2132-24	24"
10-2132-36	36"
10-2132-48	48"

304 FLEX TUBE

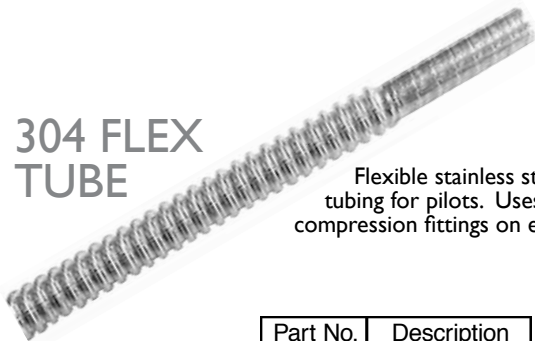

Flexible stainless steel tubing for pilots. Uses regular compression fittings on ends.

Part No.	Description
T4-12	1/4" O.D.



Supr-Quik™ Disconnect Device

Part No.	Description
R50	1/2"
R75	3/4"

Supr-Quik permits instant disconnection and fast, easy connection to gas supply line without using tools. Simply pull back operating ring and Supr-Quik springs apart and shuts off gas. For gas connection bring two parts of Supr-Quik together until they snap in place. Fusible link (thermal shutoff) cuts off gas flow in presence of fire.